

Description


Multi-grip countersunk head rivet - Aluminium/Steel

Optimal for applications where material thickness varies. The wide grip range ensures one rivet is suitable for a wide range of applications requiring a flush finish.



Material	Body:	Aluminium Alloy	ALMG 2.5
	Mandrel:	Carbon Steel	SAE 1006-1022
Finish	Body:	Bright finish surface	
	Mandrel:	Zinc Plated Cr VI free	
	Angle of countersink:	120 Degree	

Specifications

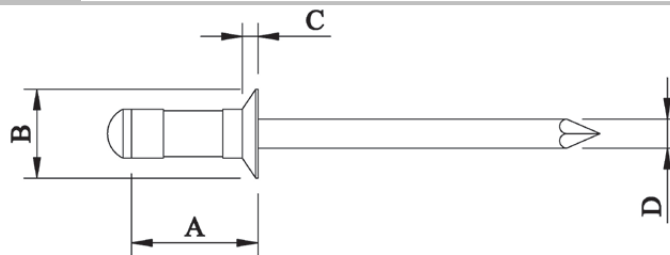

Dimensions

Part Code	Diameter	Grip Range	Hole Size	A	B	C	D
TV04-0615	4.80 (3/16")	2.0 – 8.0	4.90	12.00	±0.05	±0.05	2.65
TV04-0621	4.80 (3/16")	6.0 – 12.0	4.90	16.00	±0.05	±0.05	2.65

Part Code	Shear Strength kN	Tensile Strength kN
TV04-06**	1.500	2.350

Dimensions and specifications are subject to change without notice.
Check your distributor for the latest data sheet

As this data is based on multiple tests in various thicknesses we recommend testing the fastener in your application when an exact strength figure is required, or the load to be applied comes close to the published data