

### Description


Large flange rubber insert - Brass Thread

These elastic Rubber Blind Nut Inserts are available in various lengths and sizes. They can be installed and removed again from one side with the use of common tools. Once installed, they offer excellent vibration absorption, no electrical conduction and a watertight seal. These inserts are suitable for a wide range of applications in all types of materials, including thin and thick plates, pipes, glass, plywood, hard plastics, fibreglass and other composite materials.



**Body** - E.P.D.M.  
**Thread** - Brass

### Specifications

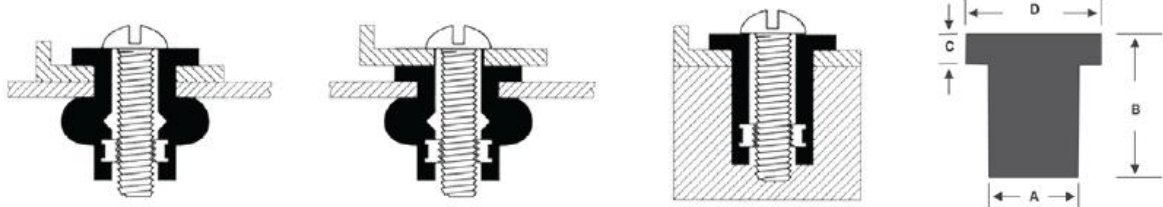

### Dimensions

Part Code	Thread Size	Grip Range	Hole Size	A	B	C	D
IN-RN03-4.0B	M3	0.4 – 4.0	8.00	7.90	12.60	1.20	11.00
IN-RN04-4.0B	M4	0.4 – 4.0	8.00	7.90	12.60	1.20	11.00
IN-RN05-4.9B	M5	0.4 – 4.9	9.70	9.60	14.40	0.90	12.70
IN-RN05-10.0B	M5	4.0 – 10.0	9.70	9.60	21.50	0.90	14.00
IN-RN06-4.0B	M6	0.4 – 4.0	12.80	12.70	16.00	1.30	16.00
IN-RN06-8.7B	M6	4.7 – 8.7	12.80	12.70	20.30	1.30	16.00
IN-RN08-4.0B	M8	0.4 – 4.0	16.00	15.90	18.30	3.20	21.50
IN-RN08-9.5B	M8	4.0 – 9.5	16.00	15.90	27.90	5.70	21.50
IN-RN10-11.1B	M10	0.4 – 11.1	19.20	19.05	27.00	3.00	25.00

Dimensions and specifications are subject to change without notice.  
 Check you distributor for the latest data sheet

As this data is based on multiple tests in various thicknesses we recommend testing the fastener in your application when an exact strength figure is required, or the load to be applied comes close to the published data

Profast Pty Ltd QLD

P: +61 7 3265 2267

F: +61 7 3265 2257

E: salesQLD@profast.com.au

W: www.profast.com.au

Profast WA Pty Ltd

P: +61 8 9456 5537

F: +61 8 9455 2659

E: salesWA@profast.com.au

W: www.profast.com.au