


Description

Button head Max Grip pin – Aluminium

Two piece swage lock fastening system consisting of a pin and a collar. These fasteners are versatile due to their wide grip range, high speed assembly and high shear and tensile strengths for an aluminium fastener. The fasteners offer high clamp up force and vibration resistance.



Specifications

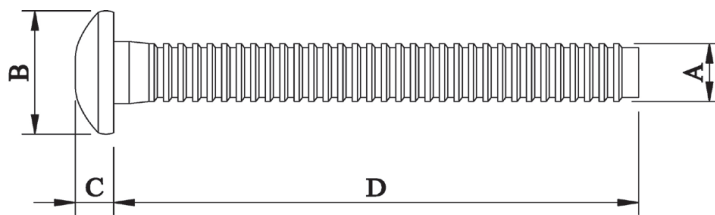

Dimensions

Part Code	Diameter	Grip Range	Hole Size	A	B	C	D
SPBE-0610	4.80 (3/16")	1.6 – 16.0	-.02	-0.2	Max	Max	Max
SPBE-0620	4.80 (3/16")	8.0 – 32.0	5.20	5.00	10.10	3.20	61.00
SPBE-0810	6.40 (1/4")	1.6 – 16.0	6.80	6.60	13.40	4.00	52.05
SPBE-0820	6.40 (1/4")	8.0 – 32.0	6.80	6.60	13.40	4.00	67.00

Part Code	Shear Strength KN	Tensile Strength KN	Clamp Force KN
SPBE-06**	3.300	4.000	2.500
SPBE-08**	5.300	7.200	4.000

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet

As this data is based on multiple tests in various thicknesses we recommend testing the fastener in your application when an exact strength figure is required, or the load to be applied comes close to the published data

Profast Pty Ltd QLD

P: +61 7 3265 2267

F: +61 7 3265 2257

E: salesQLD@profast.com.au

W: www.profast.com.au

Profast WA Pty Ltd

P: +61 8 9456 5537

F: +61 8 9455 2659

E: salesWA@profast.com.au

W: www.profast.com.au