


## Description

Hydro-pneumatic Riveting Tool with vacuum mandrel

This solid, lightweight, reliable tool features a quick cycle time while maintaining a high traction force. Capacity is up to 3/16" (4.8mm) in steel and aluminium. The TA-950R also features variable vacuum mandrel extraction as well as a mandrel container at the rear for spent mandrels. The TA-950R provides excellent value for money for small to moderate installers of 3/16" steel and aluminium rivets.



Simple vacuum extraction control

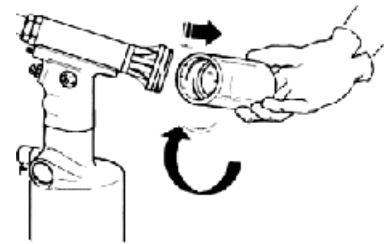


Removable Mandrel Container

## Specifications

<b>Model</b>	TA-950R
<b>Type</b>	Hydro-Pneumatic
<b>Construction</b>	Aluminium & ABS Plastic
<b>Capacity</b>	3/16"
<b>Weight</b>	1.54kg
<b>Traction Force</b>	6.2 bar – 950 kg

## Dimensions

<b>A</b>	285mm
<b>B</b>	265mm
<b>C</b>	93mm
<b>D</b>	55mm

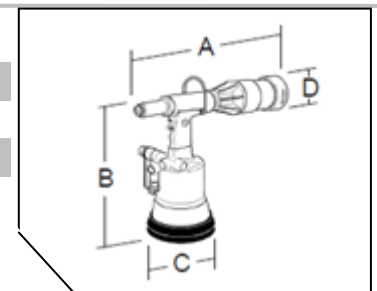

Dimensions and specifications are subject to change without notice. Check you distributor for the latest data sheet

As this data is based on multiple tests in various thicknesses we recommend testing the fastener in your application when an exact strength figure is required, or the load to be applied comes close to the published data

Profast Pty Ltd QLD  
Profast Pty Ltd NSW  
Profast WA Pty Ltd

P: +61 7 3265 2267  
P: 0408 153 589  
P: +61 8 9456 5537

F: +61 7 3265 2257  
F: +61 7 3265 2257  
F: +61 8 9455 2659

E: salesQLD@profast.com.au  
E: salesNSW@profast.com.au  
E: salesWA@profast.com.au

W: www.profast.com.au  
W: www.profast.com.au  
W: www.profast.com.au