


Description


Aluminium Peel Rivet with Locked Mandrel

Optimal for applications where material thickness varies. The wide grip range ensures one rivet is suitable for a wide range of applications.

Material	Body:	Aluminium Alloy	ALMG 3.5/5.0
	Mandrel:	Carbon steel	
Finish	Body:	Natural	
	Mandrel:	Zinc Plated Cr VI free	

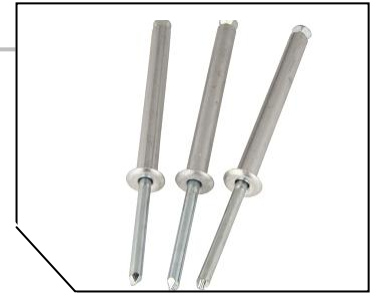

Specifications

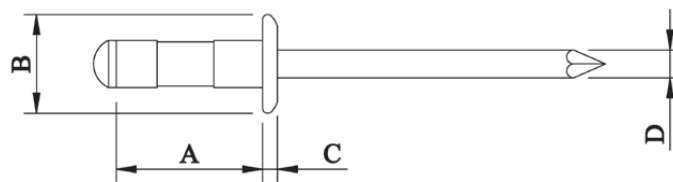

Dimensions

Part Code	Diameter	Grip Range	Hole Size +0.1	A -0.1	B ±0.05	C ±0.05	D ±0.1
TPRD-08051	1/4"	18.0 – 32.0	6.90	51.00	12.00	1.80	3.60
TPRD-08064	1/4"	29.0 – 46.0	6.90	64.00	12.00	1.80	3.60
TPRD-08076	1/4"	41.0 – 58.0	6.90	76.00	12.00	1.80	3.60
TPRD-08088	1/4"	53.0 – 70.0	6.90	88.00	12.00	1.80	3.60
TPRD-08102	1/4"	66.0 – 83.0	6.90	102.00	12.00	1.80	3.60

**Sizes up to 235.0mm grip available on request

Shear Strength

Part Code	Stem in shear plane kN	Stem outside shear plane kN	Tensile Strength kN
TPRD-08***	2.451	2.451	3.138

Dimensions and specifications are subject to change without notice.
Check your distributor for the latest data sheet

As this data is based on multiple tests in various thicknesses we recommend testing the fastener in your application when an exact strength figure is required, or the load to be applied comes close to the published data

Profast Pty Ltd QLD	P: +61 7 3265 2267	F: +61 7 3265 2257	E: salesQLD@profast.com.au	W: www.profast.com.au
Profast Pty Ltd NSW	P: 0408 153 589	F: +61 7 3265 2257	E: salesNSW@profast.com.au	W: www.profast.com.au
Profast WA Pty Ltd	P: +61 8 9456 5537	F: +61 8 9455 2659	E: salesWA@profast.com.au	W: www.profast.com.au